



## Terms of Use

### 1. Check before each use

Before each use, make sure that all SKILOO parts are in good condition, without cracks or visible damage.

### 2. Secure fixings

check the tightness of the fixing screws on the frame and seat post. Make sure they are properly adjusted to avoid any risk of disassembly during use.

### 3. Proper fit

Adjust SKILOO parts correctly according to the size of your skis and the frame of your bike. An improper adjustment can compromise safety.

### 4. Road conditions

Avoid roads with hazards such as potholes, large gravel, or obstacles that could compromise the stability of the SKILOO system.

### 5. Contact in case of problem

If you have any problems, please contact us for assistance.

## Instructions for use

There you have it, you have arrived at the instructions for your Skiloo ! We have prepared these few illustrations for you so that you can put Skiloo on your bike.

### Skiloo Parts List

1. Frame support
2. Fixing screws x4
3. Washers x2
4. Seatpost support
5. Nuts x4

### Necessary material

1. 5mm Allen key (not supplied)
2. (Optionally) Hacksaw

### The assembly steps

Important: The steps below must be followed and read carefully to be able to transport your skis safely.

## Front



1. Place the washers in the designated location.



2. Add the screws into the holes.



3. Take the lower part of the front piece. Align the screws opposite the two nuts.



5. Take the largest strap. Pass it through the first slot provided for this purpose. The black writing on the strap must be facing outwards.



7. The front part is ready.



4. Take the 5mm Allen key and screw it in.



6. Pass the strap through the second slot.

Tip: You can add a piece of rubber (inner tube type) to avoid marking your frame and prevent slipping.

## Back



1. Take both parts and place them on the seat post.

Tip: You can add a piece of rubber (inner tube type) to prevent any slipping and possible markings on the seat post.




3. Screw firmly with the 5mm Allen key.

**WARNING!!** The screws may be too long depending on the size of your seat post. It is important to check their sizes and cut them with a hacksaw, to avoid damaging your skis.



2. Take the screws and put them in the holes.

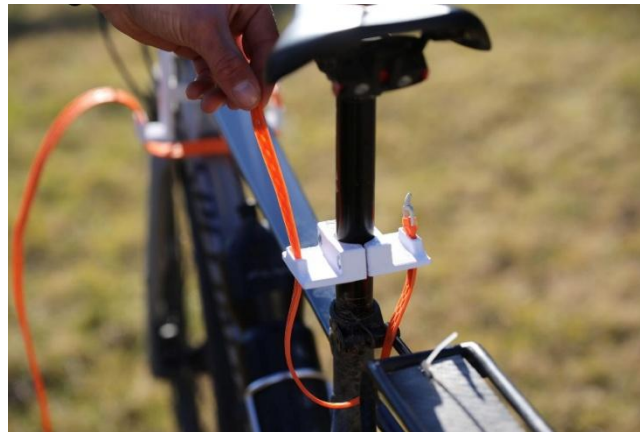

4. Place the small strap like the first one in the slots provided.

## Put your skis



1. Place the first ski in the slots



3. Pass the strap through the metal ring.



5. Same thing for the back strap.



2. Add the second ski.



4. Tighten the strap firmly.

Your set is ready!